

Task 2 Submission

Intern Name	Shivang Saini
Candidate ID	IS-2026-9132
Organization	InternSpark Internship Program
Platform	Amazon Web Services (AWS)


Objective

Launch an AWS EC2 instance (Ubuntu t2.micro), install and configure the Nginx web server, deploy a custom static HTML page, and make it publicly accessible via the instance's public IP on port 80. This task demonstrates proficiency with cloud virtual machines, SSH access, Linux server administration, security group configuration, and web server deployment.

Steps Taken

Step 1 — Launch EC2 Instance


A new EC2 instance named **Intern-Web-Server** was launched in the ap-south-1 (Mumbai) region using the Ubuntu Server AMI on a **t2.micro** (free-tier eligible) instance type. A key pair was created for SSH access and a security group was configured to allow inbound HTTP traffic on port 80 and SSH on port 22.

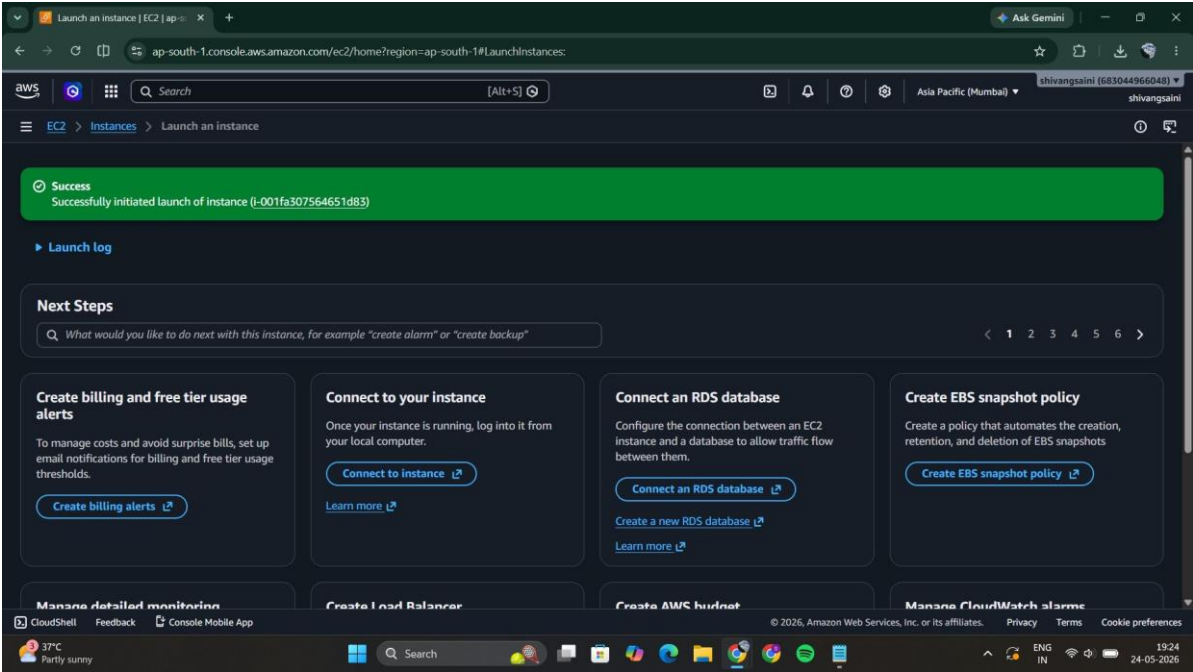

Screenshot 1: EC2 instance successfully launched — i-001fa307564651d83

Step 2 — Verify Instance Details

After launch, the instance reached a **Running** state. Key details confirmed: Instance ID **i-001fa307564651d83**, Public IPv4 address **3.110.45.198**, Instance type **t2.micro**, and VPC assignment. The public DNS was also noted for SSH access.

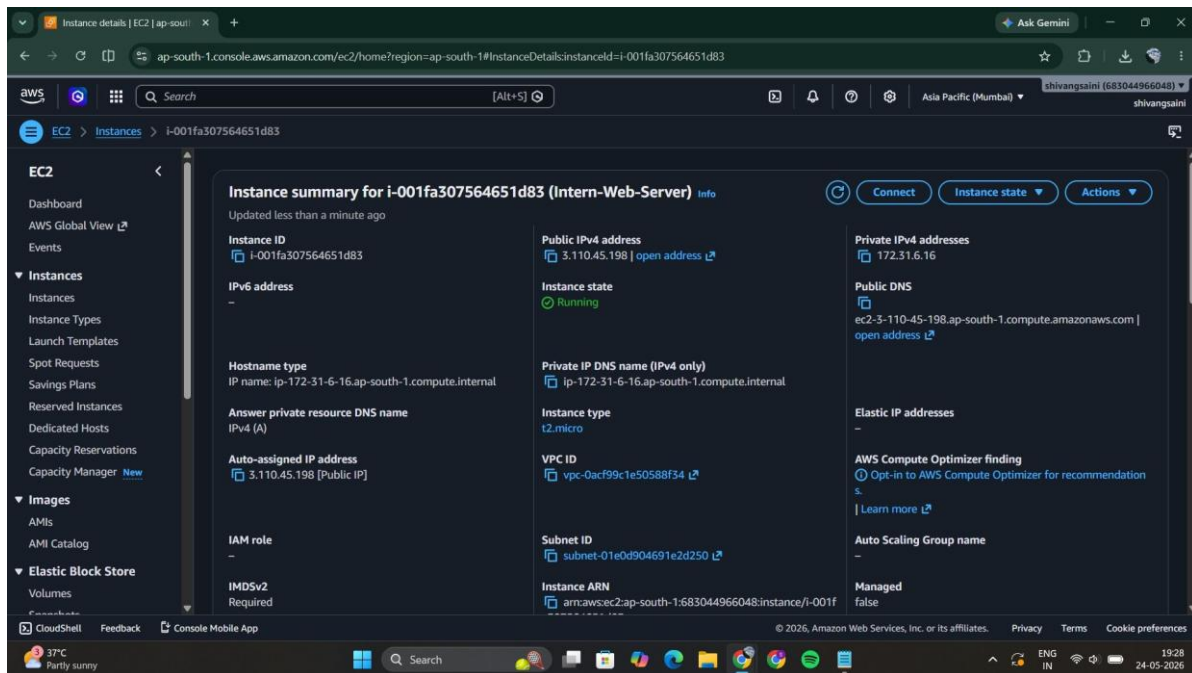


Screenshot 2: Instance details — Running state with Public IP 3.110.45.198

Step 3 — SSH & Install Nginx

```
sudo apt update
sudo apt install nginx -y
sudo systemctl status nginx
echo "<html><body style='background:#e8f4fc;font-family:sans-serif;display:flex;
justify-content:center;align-items:center;height:100vh;flex-direction:column'>
<h1>Hello from Cloud VM!</h1>
<p>Task 2 completed successfully by Shivang Saini.</p>
</body></html>" | sudo tee /var/www/html/index.html
sudo systemctl restart nginx
```

Connected to the instance via SSH and ran the following commands to update packages, install Nginx, deploy a custom HTML page, and verify the service was active:

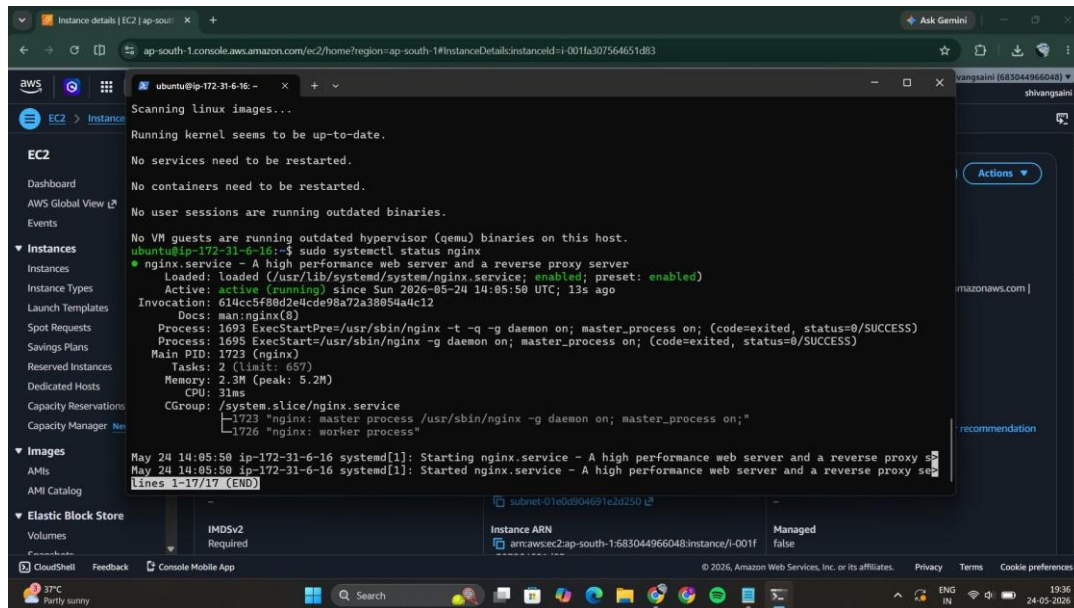


Screenshot 4: EC2 console overlaid with Nginx systemctl status output

Step 4 — Verify Live Website

Opened a browser and navigated to the instance's public IP over HTTP. The custom HTML page loaded successfully, confirming Nginx is serving content on port 80.

Public URL: <http://3.110.45.198>

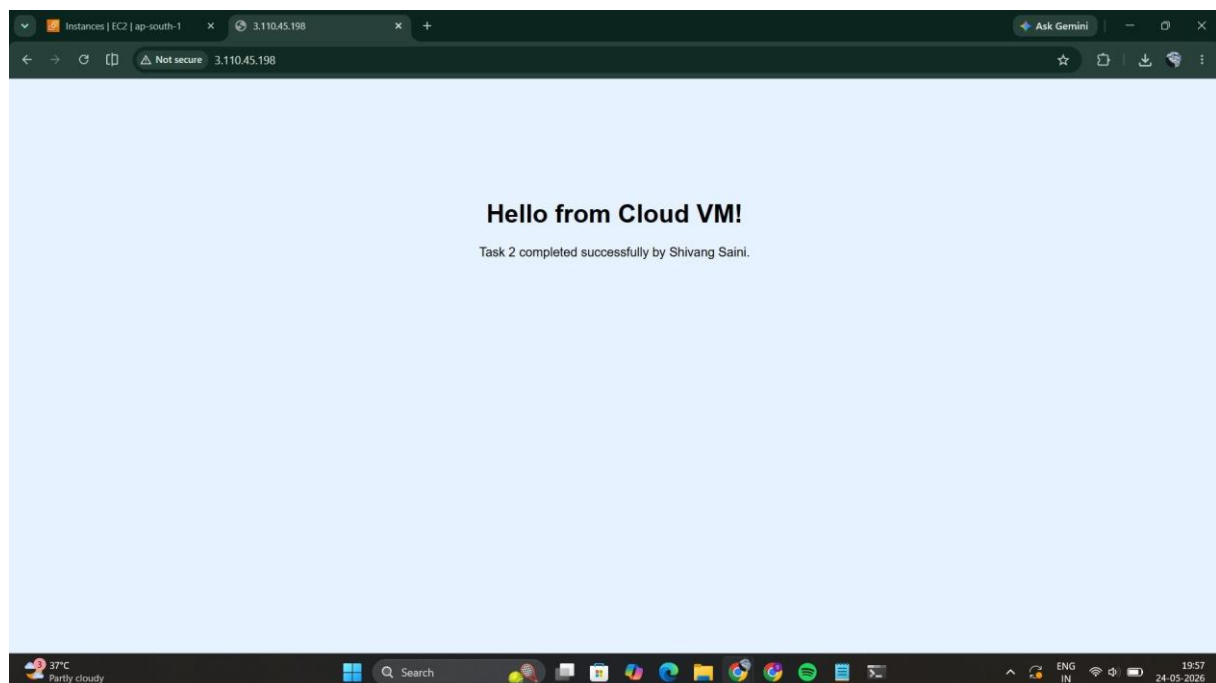

Deliverables Summary

#	Deliverable	Status / Detail
1	EC2 Instance Launched	✓ i-001fa307564651d83 (Intern-Web-Server)
2	Nginx Web Server Installed	✓ Active and running
3	Custom HTML Page Deployed	✓ /var/www/html/index.html
4	Security Group Configured	✓ Port 80 (HTTP) & 22 (SSH) open
5	Live Website URL	✓ http://3.110.45.198 — Publicly accessible
6	Screenshots	✓ 5 screenshots included